



The product shown may differ from standard configuration.

MSG 20

Compact seat with mechanical suspension



MSG 20

Technical data

Compact seat

Fentures

All MSG 20 seats are optimally designed to attenuate the vibrations to which forklift operators are typically subjected, featuring suspension travel of 60 mm. They are also simple to set to any user weight between 50 and 130 kg. In addition, the seat's fore-aft position can be varied by 150 mm or 210 mm, depending on the seat version, to provide enough space for every body size and work situation.






		1.00 =0
ARTICLE NO.		
Fahric	1203150	

	ARTICLE NO.					
	Fabric			1293150		
	Imitation leather	134015	141999	142001	143465	1017487
	STANDARD FEATURES					
	Mechanical suspension	•	•	•	•	•
	Suspension stroke, 60 mm	•	•	•	•	•
1	Weight adjustment, 50 - 130 kg	•	•	•	•	•
2	Fore/aft adjustment, 150 mm		•	•	•	
	Fore/aft adjustment, 210 mm	•				•
3	Adjustable backrest angle	•	•	•	•	•
4	Restraint system					
	Duo-sensitive retractable belt		0	0	•	
	Belt holder preassembled	•				•
	Seat cushion width	470 mm	470 mm	470 mm	470 mm	470 mm
	Operator presence switch (OPS)			•	•	•
	OPTIONAL FEATURES					
5	Armrests, 45 mm x 300 mm, foldable	0	0	0	0	0
5	Document box	0	0	0	0	0
	Retractor belt	0	0	0		0
	Static belt	0	0	0		0
	Seat heating	0	0	0	0	0

Measurements (installation dimensions)



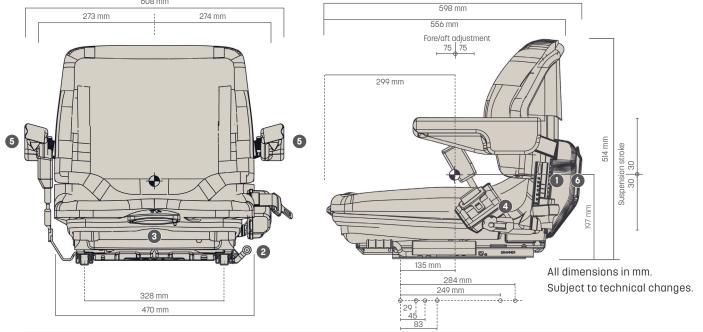

MSG 20