

MSG 20 NARROW

Compact seat with mechanical suspension



MSG 20 NARROW

Technical data

Compact seat

All MSG 20 seats are optimally designed to attenuate the vibrations to which forklift operators are typically subjected, featuring suspension travel of 60 mm. They are also simple to set to any user weight between 50 and 130 kg with an easy-to-use lever on the backrest, resulting in optimal suspension comfort for every operator. In addition, the seat's fore-aft position can be varied by up to 150 mm to provide enough space for every body size and work situation. The narrow version with a cushion width of 410 mm is specially optimized for reach-type forklift trucks.





| Features | MSG 20 NARROW | MSG 20 NARROW |
|----------|---------------|---------------|
| Features | MSG 2U NARRUW | MSG 20 NARRUW |


| | ARTICLE NO. | | |
|---|--------------------------------|---------|---------|
| | Fabric | 1293151 | 1293152 |
| | Imitation leather | 135671 | 135673 |
| | STANDARD FEATURES | | |
| | Mechanical suspension | • | • |
| | Suspension stroke, 60 mm | • | • |
| 1 | Weight adjustment, 50 - 130 kg | • | • |
| 2 | Fore/aft adjustment, 150 mm | • | • |
| 3 | Adjustable backrest angle | | |
| | | | |


| Seat cushion width | 410 mm | 410 mm |
|-----------------------------------|--------|--------|
| Operator presence switch (OPS) | | • |
| OPTIONAL FEATURES | | |
| Armrests 54 mm x 300 mm, foldable | 0 | 0 |
| Document box | 0 | 0 |
| Restraint system | | |
| Static belt | 0 | 0 |
| Retractor belt | 0 | 0 |
| Seat heating | 0 | 0 |

Measurements (installation dimensions)

STANDARD FEATURES

O OPTIONAL FEATURES

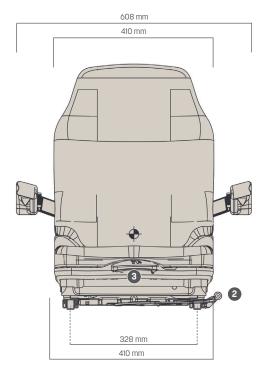

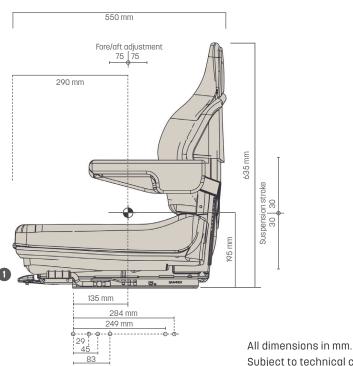

Subject to technical changes.