



The product shown may differ from standard configuration.

PRIMO[®] XM PLUS

Standard Seat with Mechanical Suspension



PRIMO® XM PLUS

Technical data

Standard seat

This model's low-constructed mechanical suspension with 80 mm of travel features an easily accessible ratcheting handle for optimal adjustment to the driver's weight. Safe, ergonomic sitting is also ideally enabled by a new, comfortable 520 mm-wide seat cushion. The seat meets the latest safety requirements and is equipped with a seat and belt contact switch as well as a duosensitive ELR-belt system with orange belt straps as standard. Additionally, the Primo XM Plus features an individually adjustable, mechanical lumbar support.



Features

ARTICLE NO.	PRIMO® XM PLUS
Fabric	1451073
Imitation leather	1451072
STANDARD FEATURES	
Shock absorber, nonadjustable	●
Suspension, mechanical	●
Suspension stroke, 80 mm	●
1 Weight adjustment, manual, 45-170 kg	●
2 Fore/aft adjustment, 210 mm	●
3 Lumbar support, mechanical	●
4 Adjustable backrest angle	●



PRIMO® XM PLUS

5 ELR-belt system, duosensitive, orange belt	●
Belt buckle with contact switch	●
Seat cushion width	520 mm
Operator presence switch (OPS)	●
OPTIONAL FEATURES	
6 Document box	○
7 Armrests, height adjustable, 60 mm x 320 mm	○
Fore/aft isolator*	○
8 Backrest extension, integrated	○
9 Seat heating	○

* Fore/aft isolator not for earth-moving machinery

Measurements (installation dimensions)

● STANDARD FEATURES ○ OPTIONAL FEATURES

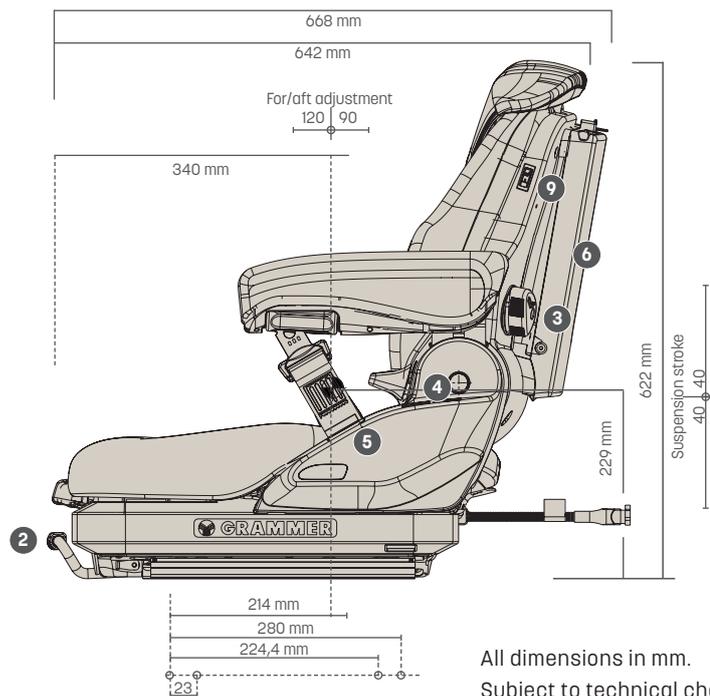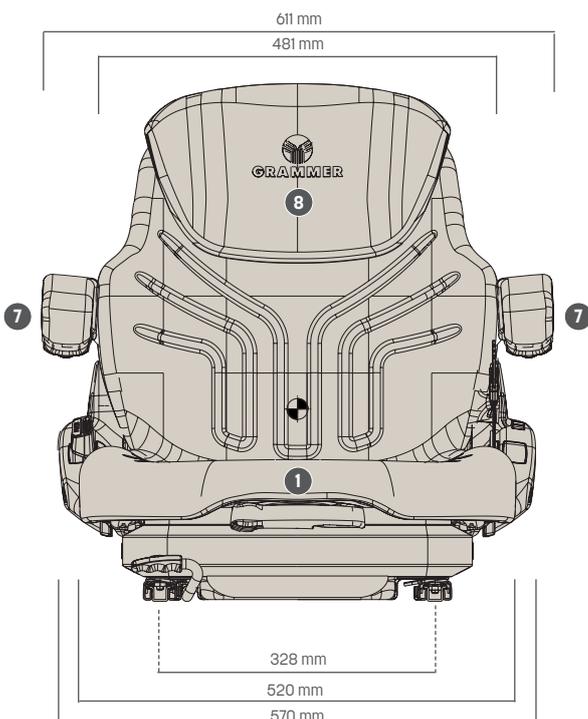

All dimensions in mm.
Subject to technical changes.